

# BCC VISION

Erogatore Professionale



**PRODUZIONE  
ACQUA CONTINUA**  
WATER PRODUCTION

**30 l/h**



**EROGATORE D'ACQUA MICROFILTRATA  
NATURALE AMBIENTE, FREDDA, FREDDA FRIZZANTE  
PROFESSIONAL MICROFILTERED DISPENSER  
NATURAL WATER, SPARKLING WATER AND  
AT AMBIENT TEMPERATURE**




**NATURAL  
WATER**

## CARATTERISTICHE TECNICHE



Erogazione	Acqua microfiltrata naturale ambiente, fredda e fredda frizzante
Alimentazione	230V - 50Hz
Watt	310 W - 1,35A
Temperatura acqua fredda	4 - 10° C
Compressore potenza	1/8 HP
Gas refrigerante quantità	HC R290
Temperatura acqua	5°C a 12°C
Massima erogazione continua (l)	6
Capacità di raffreddamento l/h	30
Raffreddamento	Ventilazione forzata
Struttura esterna	Acciaio inox, termopalstica e alcune parti in alluminio
Allarmi/display	No acqua, No Co2, perdita acqua
Peso Netto	30 kg
Dimensioni	400 x 400 x 1360 mm (L-P-H)

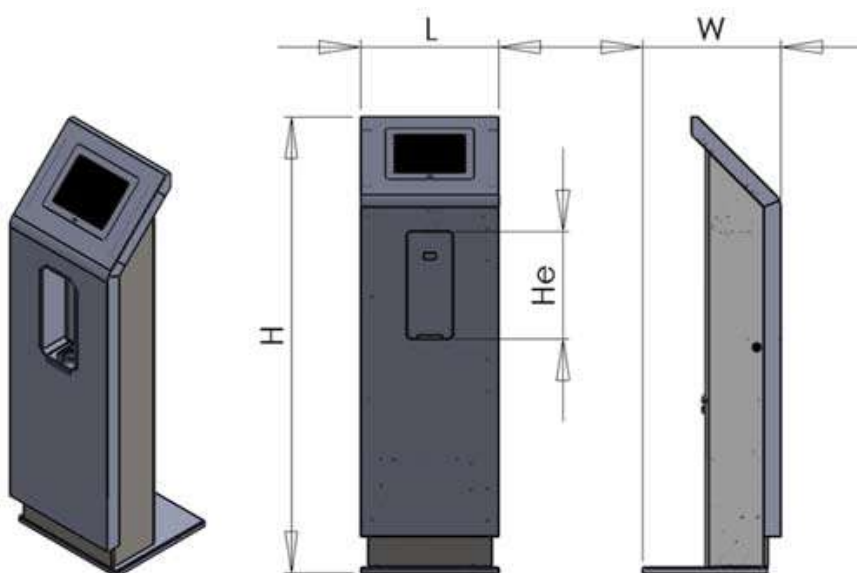

### EDEF SA Natural Water

Showroom: Via Valdani 1, 6830 Chiasco  
e-mail : [info@naturalwater.ch](mailto:info@naturalwater.ch)  
web : [www.naturalwater.ch](http://www.naturalwater.ch)

## TECHNICAL FEATURES



Dispenser	Natural microfiltered room water, cold and sparkling water
Power supply	230V - 50Hz
Watt	310 W - 1,35A
Cold water temperature	4° - 10° C
Compressor power	1/8 HP
Refrigerant Gas	HC R290
Temperatura acqua	5° a 12° C
Max continuous supply l	6
Cooling capacity (l/h)	30
Cooling	Forced ventilation
Material	Acciaio inox, thermoplastic and some aluminum parts
Net weight	30 kg
Dimensions	400 x 400 x 1360 mm (L-P-H)