

# LENA

Sistema ad Osmosi Inversa a flusso diretto «Sottozoccolo»

*Direct flow Reverse Osmosis system «Under baseboard»*



**PRODUZIONE  
ACQUA OSMOTIZZATA**

*OSMOTIC WATER  
PRODUCTION*

**70 l/h** ( $\pm 10\%$ )



**EROGATORE D'ACQUA OSMOTIZZATA**  
*OSMOTIC WATER DISPENSER*

**NATURAL  
WATER**

## CARATTERISTICHE TECNICHE




Alimentazione	220 V - 50 Hz
Pompa	Booster a membrana 220 V by Aquatech made in USA
Membrane Osmotiche	n° 2 da 150 GPD TFC (Thin Film Composite)
Filtro	n°1 in carbone attivo alimentare in line da 12" - 10 micron
Peso	10 kg
Dimensioni	100 x 400 x 370 mm (L-H-P)
Centralina elettronica	- ritardo avvio pompa - sensore acustico anti-allagamento con blocco funzioni ed ingresso acqua

## TECHNICAL FEATURES



Power supply	220 V - 50 Hz
Pump	Booster with membrane 220 V by Aquatech made in USA
Osmotic membrane	n° 2 of 150 GPD TFC (Thin Film Composite)
Filter	n°1 12" in-line activated granular carbon filter - 10 micron
Weight	10 kg
Dimensions	100 x 400 x 370 mm (W-H-D)
Electronic control unit	- late start pump - anti-flooding acoustic sensor with block functions for incoming water

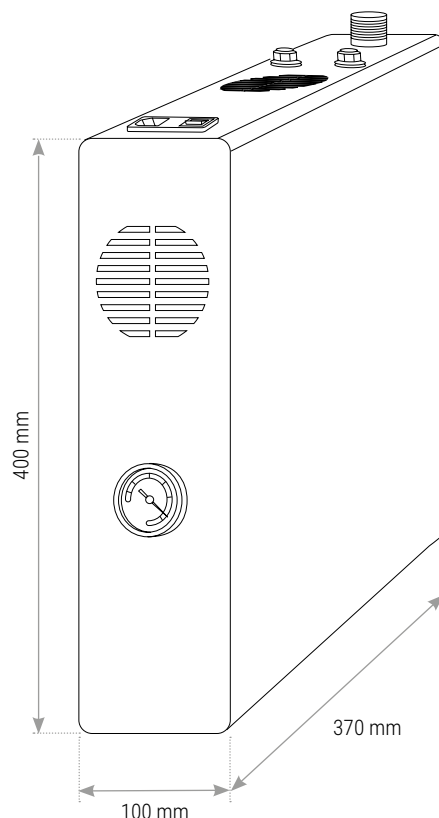

## ACCESSORI IN DOTAZIONE

SUPPLIED ACCESSORIES



Kit di installazione  
Installation Kit

## ACCESSORI OPZIONALI

OPTIONAL ACCESSORIES



RUBINETTO - FAUCET  
Miscelatore a 1 via  
One-way mixer tap low cane



RUBINETTO - FAUCET  
Monocomando a 3 vie  
canna bassa  
Single-control, Three-way  
mixer tap - low cane



RUBINETTO - FAUCET  
Monocomando a 3 vie  
canna alta  
Single-control, Three-way  
mixer tap - high cane



RUBINETTO - FAUCET  
long-reach

**NATURAL**  
WATER

**EDEF SA**  
**Natural Water**

Showroom: Via Valdani 1, 6830 Chiasso  
e-mail : [info@naturalwater.ch](mailto:info@naturalwater.ch)  
web : [www.naturalwater.ch](http://www.naturalwater.ch)